


## Premium Lamination Film

(Thin Gauge)



### Key Features

- Polyester base offers advanced surface properties
- Offers good dimensional stability during one-side or both side lamination jobs
- Low melt co-polymer ensures high bond strength at lower lamination temperatures
- Common applications - Leaflets, posters, menu cards, carton boxes

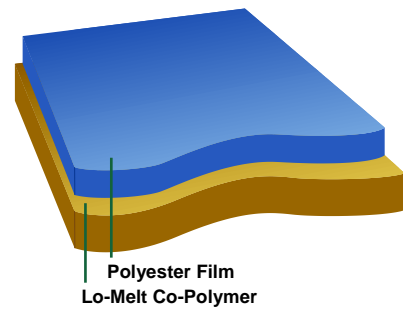

### Physical Characteristics

Properties	Unit	Test Method	Polyester						
Thickness (Structure)	Mil		1 (.5/.5)	1.2 (.5/.7)	1.5 (.5/1)	1.7 (.5/1.2)	3 (.6/2.4)	3.0 (1/2)	3 (1.4/1.6)
	Micron		24 (12/12)	30 (12/18)	37(12/25)	42 (12/30)	75 (12/63)	75 (23/52)	75 (36/39)
GSM	gm/m <sup>2</sup>	Polyplex	28.1	33.7	40.3	45.0	76.0	81.1	87.0
Yield	m <sup>2</sup> /Kg	Polyplex	35.6	29.7	24.8	22.3	13.2	12.4	11.5
Lamination Temperature		Polyplex	110° ~ 130°C (230° ~ 260°F)						
Corona Treatment	Dyne	ASTM D-2578	46 ~ 52						
Coating Side			38 ~ 42						
Substrate Side									
Surface Finish			Gloss / Matte						

### Standard Roll Sizes

Core Size		26mm (1")	58mm (2.25")	77mm (3")
		✓	✓	✓
Width	inch			6 ~ 71
	mm		12 / 18 / 25 / 27 305 / 458 / 635 / 686	152 ~ 1800
Length	ft		250 / 500 / 750	3000 / 6000 / 10,000
	m		75 / 150 / 225	1000 / 2000 / 3000